

+AC2709SE.PD-5_L_ALU

MALDIVES WITH MOBILE BRIDGE - LEAVES



Dimensions



Safety area

11,1 x 13 m



Impact area

47 mq



Falling height HIC

140 cm



Physical footprint


7,6 x 9,5 x 4 m



Number of users

25

Characteristics



hdpe



stainless steel screws



use under surveillance

Age range

From 3 to 12 years

Materials



anodised aluminium

Made of EN EV6060 anodized aluminium 9x9cm custom mold with rounded edges, minimum thickness 2,7mm

Plan


Picture

Manufacturer

Pozza 1865 S.R.L.

Country of manufacturing


ITALY

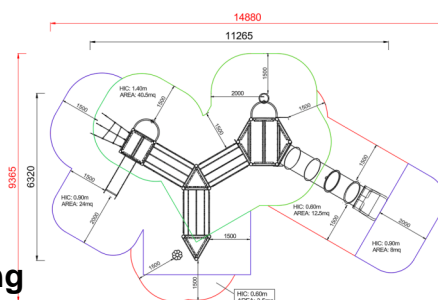

Area di sicurezza totale / Total safety area: 88mq
Altezza Max di Caduta / Max falling height: 1.40m



Components list



xBV-4_L_ALU - NG Helicopter Activity Panel Leaves

N. 1 Made of colored polyethylene, sandwich type, with flow lanes, rotating disk and central knob



xCTBR0012_ALU - NG Fantasy holding bar

NR 1 Fantasy steel holding bar L.860



xGT-06_ALU - NG Step Flower

NR 1 Polyethylene flower supported by a galvanized steel bean



xLP-20_ALU - NG Large Leaf Accessory

N. 1 Leaves panel



xLP-5_ALU - NG Small Leaf Accessory

N. 2 Leaves panel



xP-7_L_ALU - NG Green Simple Panel

N. 1 Panel made of HDPE polyethylene, bi-color 86cm in width with drawing on the outer layer. all the fixing elements in Stainless steel



xPD-5_ALU - NG Right mobile bridge

N. 1 Mobile bridge made of a painted steel frame with HDPE moving flowers as base and a rubber floor for safety



xPI-5_ALU - NG Inclined mobile bridge

NR 1 Made of impregnated wood, with laminated wood beams oscillating hanging on to the handrail with steel ropes coated



xPP-9_ALU - NG Fireman pole h 90 cm

NR 1 Made of tubular stainless steel



xPS-14_ALU - NG Spiral perch h 140 cm

NR 1 Composed by stainless steel tubular, support bracket and locking handles in painted steel



xS6-9_ALU - NG Shroud lift h90 cm

NR 1 Composed by climbing net in steel rope. Included by thrust bar



xSVPX-14_L_ALU - NG Poly-Inox Slide h140 Leaves

N. 1 slide with lateral sides made of polyethylene and stainless steel slide certified according to the existing rules; starting platform height 140 cm; provided with a transversal bar.



xT-4_ALU - NG Triangular tower without roof h 40cm:

N. 1 Composed of 3 posts having a pentagonal section by lamellar wood, 1 square platform placed at a height of 40 cm.



**xT-9_ALU - NG Triangular tower
without roof h 90cm:**

NR 1 Composed of 3 posts having a pentagonal section by lamellar wood, 1 square platform placed at a height of 90 cm.

METODO DI FISSAGGIO A TERRA DEI MONTANTI DEL GIOCO: Attrezzatura predisposta per fissaggio a terra mediante l'utilizzo di appositi telai metallici.

INFORMAZIONI RELATIVE ALL'ISPEZIONE: Ispezione visiva periodica - Controllo della pulizia dell'attrezzatura - Controllo degli interspazi tra terreno ed attrezzatura - Controllo della consistenza del terreno - Controllo delle fondamenta - Controllo degli spigoli - Controllo dell'eventuale mancanza di parti - Controllo dell'usura eccessiva delle parti mobili (snodi e boccole) - Controllo dell'integrità dell'intera attrezzatura. Per le aree gioco soggette ad uso intensivo o vandalismo può essere necessaria un'ispezione giornaliera. Ispezione annuale periodica: Potrebbe rendersi necessario lo smontaggio di alcune parti per la verifica