data sheet

AF102.EPAL-01COLORI

MERLINO CON PALESTRA A FUNI COLORI

Dimensions

Safety area	Impact area	Falling height HIC	Physical footprint	Number of users
1070 x 850 cm	22 mq	140 cm	720 x 540 x 335 cm	8

Characteristics

stainless steel screws

use under surveillance

5 anni GARANZIA

Age range

Fino a 12 anni

Materials

anodised aluminium

Made of EN EV6060 anodized alumium 9x9cm custom mold with rounded edges, minimum thickness 2,7mm

Plan

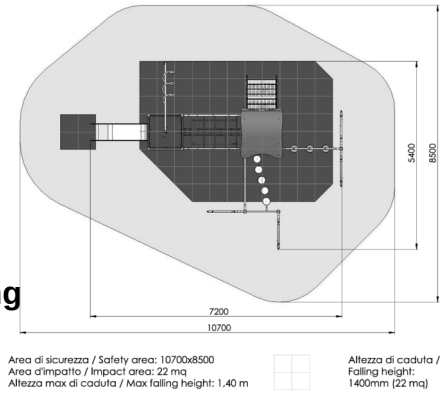

Area di sicurezza / Safety area: 10700x8500
Area d'impatto / Impact area: 22 mq
Altezza max di caduta / Max falling height: 1,40 m

Altezza di caduta / Falling height: 1400mm (22 mq)

Picture

Manufacturer

Pozza 1865 S.R.L.

Country of manufacturing

ITALY

Components list

S-14 - Climbing ladder h 140 cm
NR 1 made of impregnated wood, complete with handrails and protective panels made of polyethylene.



SVPX-9 - Straight slide h 90 cm
NR 1 slide with lateral sides made of polyethylene and stainless steel slide certified according to the existing rules; starting platform height 90 cm; provided with a transversal bar.

QT4-14ALU - Torre quadrata, pedana h 140 cm Fantasy alluminio
NR 1 Torre altezza 140cm Realizzata con nr 4 montanti in alluminio EN EV6060 anodizzato con profilo speciale 90mm x 90mm con spigoli arrotondati raggio 32mm e anime interne di rinforzo spessore minimo 2,7 mm tutta la bulloneria e fissaggi in acciaio inox, 1 pianale dimensione 1040mm x 1040mm realizzato con profili in acciaio zincato e verniciato e pedana in plastica riciclata al 95% seconda vita spessore 25mm. Tetto realizzato con due falde in polietilene HDPE composto per il 51% di plastica riciclata spessore 20mm e un pannello curvo in polietilene



PI-6 - Tibetan bridge
NR 1 The net is made of steel strands rope, 18 mm diameter, covered with a colored nylon braid, highly resistant. The knots are covered with shell-shape protections.



P-2 - Pannelli laterali di protezione oblo'
NR 1 Realizzati in polietilene colorato e oblo' in policarbonato trasparente, completi di staffe in acciaio inox per il fissaggio alla torretta.

P-7 - Protection lateral panels
NR 1 Panel made of HDPE polyethilene, bi-color 86cm in width with drawing on the outer layer. all the fixing elements in Stainless steel



PAL-01ALU - Angular gym ALU
NR 2 Vertical net with frame made of aluminium beams fixed through disappearing and passing nuts and bolts Bars realized with stainless steel tubular pegs, mounted into two lateral aluminium supports Climbing cord

METODO DI FISSAGGIO A TERRA DEI MONTANTI DEL GIOCO: Attrezzatura predisposta per fissaggio a terra mediante l'utilizzo di appositi telai metallici.

INFORMAZIONI RELATIVE ALL'ISPEZIONE: Ispezione visiva periodica - Controllo della pulizia dell'attrezzatura - Controllo degli interspazi tra terreno ed attrezzatura - Controllo della consistenza del terreno - Controllo delle fondamenta - Controllo degli spigoli - Controllo dell'eventuale mancanza di parti - Controllo dell'usura eccessiva delle parti mobili (snodi e boccole) - Controllo dell'integrità dell'intera attrezzatura. Per le aree gioco soggette ad uso intensivo o vandalismo può essere necessaria un'ispezione giornaliera. Ispezione annuale periodica: Potrebbe rendersi necessario lo smontaggio di alcune parti per la verifica

Copyright (C) POZZA 1865 S.r.l. - P.IVA IT02311670224 - info@pozza.it