


**+AF104K.SW-19\_L\_ALU**  
**RIVIERA - LEAVES**



Dimensions	Safety area	Impact area	Falling height HIC	Physical footprint	Number of users
12,8 x 11,2 m	63.5 mq	190 cm	9,8 x 7,2 x 4 m	30	

Characteristics	hdpe	stainless steel screws	use under surveillance
			


Age range	Materials	Made of EN EV6060 anodized aluminium 9x9cm custom mold with rounded edges, minimum thickness 2,7mm
Da 3 a 12 anni	 anodised aluminium	

**Plan**

**Picture**


**Manufacturer**  
Pozza 1865 S.R.L.

**Country of manufacturing**

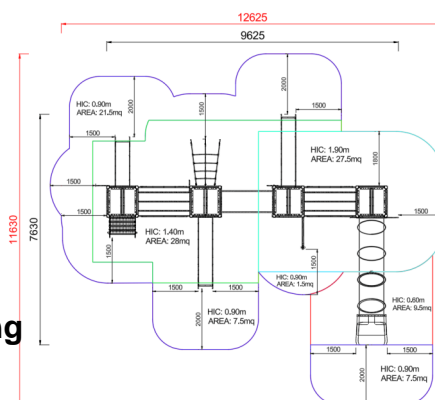

Area di sicurezza totale / Total safety area: 103mq  
Altezza Max di Caduta / Max falling height: 1,90m

## Components list



**xBV-4\_L\_ALU - NG Helicopter Activity Panel Leaves**

N. 1 Made of colored polyethylene, sandwich type, with flow lanes, rotating disk and central knob



**xLP-20\_ALU - NG Large Leaf Accessory**

N. 2 Leaves panel



**xLP-5\_ALU - NG Small Leaf Accessory**

N. 3 Leaves panel



**xP-7\_L\_ALU - NG Green Simple Panel**

N. 1 Panel made of HDPE polyethylene, bi-color 86cm in width with drawing on the outer layer. all the fixing elements in Stainless steel



**xPAL-04b\_ALU - NG Climbing**

NR 1 Made with stainless steel rugs and recycled material base with resin climbing rocks



**xPI-5\_ALU - NG Inclined mobile bridge**

NR 1 Made of impregnated wood, with laminated wood beams oscillating hanging on to the handrail with steel ropes coated



**xPR\_ALU - NG Fantasy Railing**

NR 1 Fantasy railing in painted steel



**xQ-9\_ALU - NG Square tower without roof h90 cm**

NR 1 h90 cm tower without roof made of 4 EN EV6060 anodized aluminum post with custom mold 9x9cm with rounded edges, minimum thickness 2,7mm. Central platform made of HDPE polyethylene with anti slip coating and painted and anodized steel brackets. All the fixing elements made of stainless steel



**xQT12-9\_ALU - NG Square tower h90 cm**

N. 1 .



**xQT4-14\_L\_ALU - NG Tower h140 with Roof Leaves**

N. 2 Composed by 4 posts having a 9 x 9 cm section by aluminium, 1 square platform placed at a height of 140 cm. Coloured polyethylene gable roof.




**xS6-14\_ALU - NG Shroud lift h140 cm**

NR 1 Composed by climbing net in steel rope. Included by thrust bar



**xSVPX-14\_L\_ALU - NG Poly-Inox Slide h140 Leaves**

N. 2 slide with lateral sides made of polyethylene and stainless steel slide certified according to the existing rules; starting platform height 140 cm; provided with a transversal bar.



**xSVPX-9\_L\_ALU - NG Poly-Inox Slide  
h90 Leaves**

N. 1 slide with lateral sides made of polyethylene and stainless steel slide certified according to the existing rules; starting platform height 90 cm; provided with a transversal bar.

METODO DI FISSAGGIO A TERRA DEI MONTANTI DEL GIOCO: Attrezzatura predisposta per fissaggio a terra mediante l'utilizzo di appositi telai metallici.

INFORMAZIONI RELATIVE ALL'ISPEZIONE: Ispezione visiva periodica - Controllo della pulizia dell'attrezzatura - Controllo degli interspazi tra terreno ed attrezzatura - Controllo della consistenza del terreno - Controllo delle fondamenta - Controllo degli spigoli - Controllo dell'eventuale mancanza di parti - Controllo dell'usura eccessiva delle parti mobili (snodi e boccole) - Controllo dell'integrità dell'intera attrezzatura. Per le aree gioco soggette ad uso intensivo o vandalismo può essere necessaria un'ispezione giornaliera. Ispezione annuale periodica: Potrebbe rendersi necessario lo smontaggio di alcune parti per la verifica