


AF104K

ROMA



Dimensions					
	Safety area	Impact area	Falling height HIC	Physical footprint	Number of users
	1090 x 1090 cm	42 mq	180 cm	735 x 690 x 360 cm	20

Characteristics



pine wood



pavimentazione alveolare



use under surveillance

5 anni
GARANZIA

Age range

Fino a 12 anni

Materials



legno di pino

Made of CAM compliant wood.

Manufacturer


Pozza 1865 S.R.L.

Country of manufacturing

ITALY



Plan

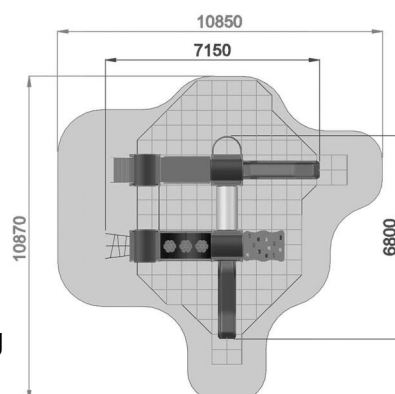
Area di Sicurezza / Safety area 75mq
Area di Impatto / Impact area 41.5mq
Altezza Max di Caduta / Max falling height 1.40m

Altezza di caduta / Falling height: 1400mm

Picture



Components list




QT4-14 - Square tower h 140 cm

NR 2 Manufactured with 4 posts having a 9 x 9 mm section by lamellar wood, 1 square platform placed at a height of 140 cm. Coloured polyethylene gable roof.




QT4-9 - Square tower h 90 cm-1

NR 2 Manufactured with 4 posts having a 9 x 9 cm section by lamellar wood, 1 square platform placed at a height of 90 cm. Coloured polyethylene gable roof.




PI-10 - Fixed inclined bridge

NR 1 Walkway made of impregnated wood, with polyethylene parapets



PI-5 - Inclined mobile bridge

NR 1 Made of impregnated wood, with laminated wood beams oscillating hanging on to the handrail with steel ropes coated



TT-17poly - Polyethylene Tunnel

NR 1 Made of polyethylene provided with panels of connection to polyethylene turrets




S-14 - Climbing ladder h 140 cm

NR 1 made of impregnated wood, complete with handrails and protective panels made of polyethylene.



S-9 - Climbing ladder h 90 cm

NR 1 made of impregnated wood, complete with handrails and protective panels made of polyethylene




S6-9 - Shroud lift h 90 cm

NR 1 Composed by climbing net in steel rope. Included by thrust bar



PP-14 - Fireman pole h 140 cm

NR 1 Made of tubular stainless steel




SVPX-14 - Scivolo h 140 cm

NR 1 Scivolo h140cm realizzato con scivolata in acciaio inox di larghezza 45cm modello inclusive per garantire l'utilizzo assistito e pannelli laterali in polietilene HDPE composto per il 51% di plastica riciclata pannelli laterali di protezione in polietilene e barra reggispianta di lunghezza 86 cm realizzata in acciaio verniciato. Tutta la bulloneria e gli elementi di fissaggio in acciaio inox




P-7 - Protection lateral panels

NR 2 Panel made of HDPE polyethylene, bi-color 86cm in width with drawing on the outer layer. all the fixing elements in Stainless steel



P-2 - Pannelli laterali di protezione oblo'

NR 1 Realizzati in polietilene colorato e oblo' in policarbonato trasparente, completi di staffe in acciaio inox per il fissaggio alla torretta.



ABACOGT-01 - OXO Panel

NR 1 Two colored polyethylene panel with serigraphy XOX symbols, 9 half-moon rolling panels, Inox steel bolts.



PAL-02 - Kit palestra lineare

NR 1 realizzata con struttura portante in legno lamellare impregnato a pressione in autoclave, rete di arrampicata in corda di acciaio rivestita e fissata alla struttura portante mediante bulloneria passante a scomparsa, spalliera verticale con pioli in acciaio inox, e fune di arrampicata con pioli

METODO DI FISSAGGIO A TERRA DEI MONTANTI DEL GIOCO: Attrezzatura predisposta per fissaggio a terra mediante l'utilizzo di appositi telai metallici.

INFORMAZIONI RELATIVE ALL'ISPEZIONE: Ispezione visiva periodica - Controllo della pulizia dell'attrezzatura - Controllo degli interspazi tra terreno ed attrezzatura - Controllo della consistenza del terreno - Controllo delle fondamenta - Controllo degli spigoli - Controllo dell'eventuale mancanza di parti - Controllo dell'usura eccessiva delle parti mobili (snodi e boccole) - Controllo dell'integrità dell'intera attrezzatura. Per le aree gioco soggette ad uso intensivo o vandalismo può essere necessaria un'ispezione giornaliera. Ispezione annuale periodica: Potrebbe rendersi necessario lo smontaggio di alcune parti per la verifica