


+AF104K.QT4-19_L_ALU ROMA WITH TUBE SLIDE - LEAVES

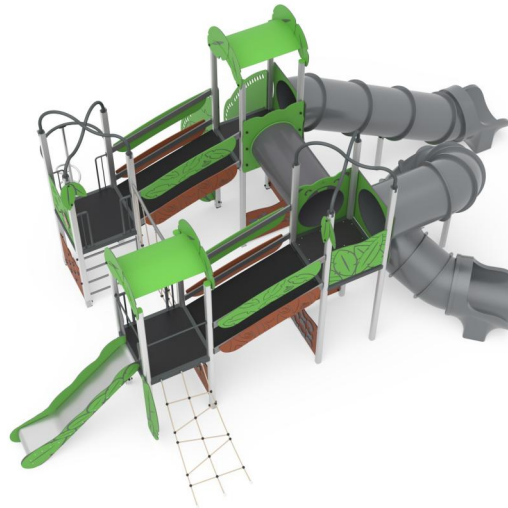

Dimensions	Safety area	Impact area	Falling height HIC	Physical footprint	Number of users
13,9 x 10,1 m	69 mq	190 cm	9,9 x 6,6 x 4,2 m	30	

Characteristics	hdpe	stainless steel screws	use under surveillance



Age range	Materials	Made of EN EV6060 anodized aluminium 9x9cm custom mold with rounded edges, minimum thickness 2,7mm
From 3 to 12 years	anodised aluminium	

Plan

Picture

Manufacturer
Pozza 1865 S.R.L.


Country of manufacturing
ITALY

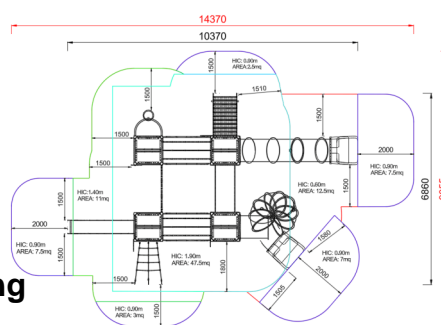

Components list



x0399_ALU - NG Closing handles
NR 2 Pair of stainless steel locking handles




xABACOGT-01_L_ALU - NG Tic-Tac-Toe Panel Leaves
N. 1 Two colored polyethylene panel with serigraphy XOX symbols, 9 half-moon rolling panels, Inox steel bolts.



xABACOU0600-N_L_ALU - NG Numbers Panel Leaves
N. 1 .



xABACOU0600-S_L_ALU - NG Mirror Panel Leaves
N. 1 .



xBV-4_L_ALU - NG Helicopter Activity Panel Leaves
N. 1 Made of colored polyethylene, sandwich type, with flow lanes, rotating disk and central knob



xLP-20_ALU - NG Large Leaf Accessory
N. 1 Leaves panel



xLP-5_ALU - NG Small Leaf Accessory
N. 1 Leaves panel



xP-7_L_ALU - NG Green Simple Panel
N. 1 Panel made of HDPE polyethylene, bi-color 86cm in width with drawing on the outer layer. all the fixing elements in Stainless steel



xPAL-02_ALU - NG Linear Gym-2
NR 2 Vertical net with frame made of lamellar wood beams fixed through disappearing and passing nuts and bolts
Bars realized with stainless steel tubular pegs, mounted into two lateral wooden supports Climbing cord



xPAL-12_ALU - NG Single Vertical Wall Bars
NR 4 .



xPS-14_ALU - NG Spiral perch h 140 cm
NR 1 Composed by stainless steel tubular, support bracket and locking handles in painted steel



xQT12-14_ALU - NG Square tower h140 cm
NR 1 .



xQT12-9_ALU - NG Square tower h90 cm
N. 1 .



xQT4-14_L_ALU - NG Tower h140 with Roof Leaves
N. 1 Composed by 4 posts having a 9 x 9 cm section by aluminium, 1 square platform placed at a height of 140 cm. Coloured polyethylene gable roof.



xS6-14_ALU - NG Shroud lift h140 cm
NR 1 Composed by climbing net in steel rope. Included by thrust bar



**xSVPX-14_L_ALU - NG Poly-Inox Slide
h140 Leaves**

N. 1 slide with lateral sides made of polyethylene and stainless steel slide certified according to the existing rules; starting platform height 140 cm; provided with a transversal bar.

METODO DI FISSAGGIO A TERRA DEI MONTANTI DEL GIOCO: Attrezzatura predisposta per fissaggio a terra mediante l'utilizzo di appositi telai metallici.

INFORMAZIONI RELATIVE ALL'ISPEZIONE: Ispezione visiva periodica - Controllo della pulizia dell'attrezzatura - Controllo degli interspazi tra terreno ed attrezzatura - Controllo della consistenza del terreno - Controllo delle fondamenta - Controllo degli spigoli - Controllo dell'eventuale mancanza di parti - Controllo dell'usura eccessiva delle parti mobili (snodi e boccole) - Controllo dell'integrità dell'intera attrezzatura. Per le aree gioco soggette ad uso intensivo o vandalismo può essere necessaria un'ispezione giornaliera. Ispezione annuale periodica: Potrebbe rendersi necessario lo smontaggio di alcune parti per la verifica