data sheet

+AF102.C0100_ALU
ALUGYM 2



Dimensions

Safety area	Impact area	Falling height HIC	Physical footprint	Number of users
11,1 x 10,9 m	74 mq	200 cm	7,2 x 7,6 x 3,5 m	30

Characteristics

stainless steel screws

Age range


Da 3 a 12 anni

Materials

anodised aluminium

Made of EN EV6060 anodized alumium 9x9cm custom mold with rounded edges, minimum thickness 2,7mm

Plan

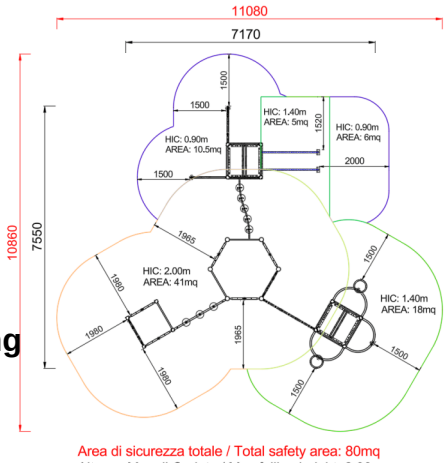

Area di sicurezza totale / Total safety area: 80mq
Altezza Max di Caduta / Max falling height: 2.00m

Picture



Manufacturer

Pozza 1865 S.R.L.

Country of manufacturing

ITALY


Components list



xPAL-01C_ALU - NG Net gym
N. 1 Vertical net with frame made of painted steel supporting a climbing net made of steel rope with nylon cover




xPAL-04b_ALU - NG Climbing
N. 1 Made with stainless steel rugs and recycled material base with resin climbing rocks



xPS-14_ALU - NG Spiral perch h 140 cm
N. 2 Composed bystainless steel tubular, support bracket and locking handles in painted steel



xPP-14_ALU - NG Fireman pole h 140 cm
N. 1 Made of tubular stainless steel



CTSC0007 - Climbing Ladder in rope:
NR 2 Made with climbing net made in coated steel rope, rungs in polymer, distance between holes cm. 40. Starting with through-screw with two chains to be fixed to the ground. Complete with chain to be fixed to the ground.



xPAL-02_ALU - NG Linear Gym-2
N. 1 Vertical net with frame made of lamellar wood beams fixed through disappearing and passing nuts and bolts Bars realized with stainless steel tubular pegs, mounted into two lateral wooden supports Climbing cord



xPD-7 _ALU - NG Rope bridge
N. 1 .




xSTI-9_ALU - NG Descending tube slide h90 cm
N. 1 Made of steel pipe




xQT12-14_ALU - NG Square tower h140 cm
N. 1 .



xQT12-9_ALU - NG Square tower h90 cm
N. 1 .



FR1-14 - CLIMBING ROPE-1
NR 1 CLIMBING ROPE



xPAL-12.1_ALU - NG Triple Vertical Wall Bars
N. 1 .



xPP-14_ALU - NG Fireman pole h 140 cm
N. 1 Made of tubular stainless steel



xPAL-08b_ALU - NG Baby Vertical Rope Ladder
N. 1 .

xG_120_90-190_ALU - NG Leg 120 from 90 190
NR 6 .

xG_90X90_90-190_ALU - NG Leg 90x90 from 90 190
N. 4 .



xS4-14_ALU - NG Steel ladder h140 cm
N. 1 Rungs made of stainless steel.
Complete with steel bar.



xS4-9_ALU - NG Steel ladder h90 cm
N. 1 rungs made of stainless steel.
Complete with steel bar

METODO DI FISSAGGIO A TERRA DEI MONTANTI DEL GIOCO: Attrezzatura predisposta per fissaggio a terra mediante l'utilizzo di appositi telai metallici.

INFORMAZIONI RELATIVE ALL'ISPEZIONE: Ispezione visiva periodica - Controllo della pulizia dell'attrezzatura - Controllo degli interspazi tra terreno ed attrezzatura - Controllo della consistenza del terreno - Controllo delle fondamenta - Controllo degli spigoli - Controllo dell'eventuale mancanza di parti - Controllo dell'usura eccessiva delle parti mobili (snodi e boccole) - Controllo dell'integrità dell'intera attrezzatura. Per le aree gioco soggette ad uso intensivo o vandalismo può essere necessaria un'ispezione giornaliera. Ispezione annuale periodica: Potrebbe rendersi necessario lo smontaggio di alcune parti per la verifica

Copyright (C) POZZA 1865 S.r.l. - P.IVA IT02311670224 - info@pozza.it