data sheet

+AF203_ALU
CAPRI - FANTASY



Dimensions

Safety area	Impact area	Falling height HIC	Physical footprint	Number of users
11,2 x 9,7 m	43 mq	140 cm	7,2 x 6,1 x 2,8 m	10

Characteristics

2 hdpe

stainless steel screws

use under surveillance

Age range

Da 3 a 12 anni

Materials

anodised aluminium

Made of EN EV6060 anodized alumium 9x9cm custom mold with rounded edges, minimum thickness 2,7mm

inclusive


Manufacturer

Pozza 1865 S.R.L.

Country of manufacturing

ITALY

Plan

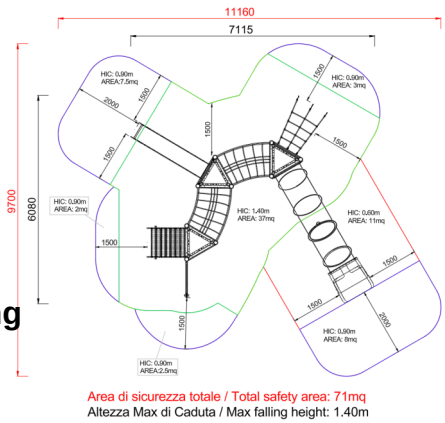

Area di sicurezza totale / Total safety area: 71mq
Altezza Max di Caduta / Max falling height: 1.40m


Picture



Components list



xBV-2_ALU - NG Gear panel Fantasy
N. 1 Vertical panel made of polyethylene and wood shelf.



xBV-3_ALU - NG Galaxy panel Fantasy
N. 1 Vertical panel made of polyethylene



xP-3C_ALU - NG Panels inside-out
N. 1 Made of polyethylene shaped with a central geometric hole, provided with stainless steel brackets for fixing them to the tower



xP-3T_ALU - NG Panels inside-out-2 Fantasy
N. 1 Made of polyethylene shaped with a central geometric hole, provided with stainless steel brackets for fixing them to the tower



xPAL-01C_ALU - NG Net gym
N. 1 Vertical net with frame made of painted steel supporting a climbing net made of steel rope with nylon cover



xPD-6.C_ALU - NG Curved Tibetan bridge
N. 1 The net is made of steel strands rope, 18 mm diameter, covered with a colored nylon braid, highly resistant. The knots are covered with shell-shape protections



xPD-6_ALU - NG Tibetan bridge-1
N. 1 The net is made of steel strands rope, 18 mm diameter, covered with a colored nylon braid, highly resistant. The knots are covered with shell-shape protections.



xS-14_ALU - NG Climbing ladder h140 cm Fantasy
N. 1 made of aluminium, complete with handrails and protective panels made of polyethylene



xS4-14_ALU - NG Steel ladder h140 cm
N. 1 Rungs made of stainless steel. Complete with steel bar.



xS6-14_ALU - NG Shroud lift h140 cm
N. 1 Composed by climbing net in steel rope. Included by thrust bar



xSVPX-14_ALU - NG Straight slide h140 cm Fantasy
N. 1 slide with lateral sides made of polyethylene and stainless steel slide certified according to the existing rules; starting platform height 140 cm; provided with a transversal bar.



xSW-14_ALU - NG Tube-shaped slide h 140 cm diameter 80 cm Fantasy
N. 1 Polyethylene slide certified according to the existing rules; starting platform height 140 cm



xTT-14_ALU - NG Triangular Tower h140 with roof Fantasy
N. 3 .

METODO DI FISSAGGIO A TERRA DEI MONTANTI DEL GIOCO: Attrezzatura predisposta per fissaggio a terra mediante l'utilizzo di appositi telai metallici.

INFORMAZIONI RELATIVE ALL'ISPEZIONE: Ispezione visiva periodica - Controllo della pulizia dell'attrezzatura - Controllo degli interspazi tra terreno ed attrezzatura - Controllo della consistenza del terreno - Controllo delle fondamenta - Controllo degli spigoli - Controllo dell'eventuale mancanza di parti - Controllo dell'usura eccessiva delle parti mobili (snodi e boccole) - Controllo dell'integrità dell'intera attrezzatura. Per le aree gioco soggette ad uso intensivo o vandalismo può essere necessaria un'ispezione giornaliera. Ispezione annuale periodica: Potrebbe rendersi necessario lo smontaggio di alcune parti per la verifica

Copyright (C) POZZA 1865 S.r.l. - P.IVA IT02311670224 - info@pozza.it