data sheet

+AF203.PAL-02_L_ALU
CAPRI WITH GYM - LEAVES

Dimensions

Safety area	Impact area	Falling height HIC	Physical footprint	Number of users
9,9 x 8 m	57.5 mq	190 cm	6,4 x 5 x 3,5 m	25

Characteristics

2 hdpe

stainless steel screws

use under surveillance

Age range

From 3 to 12 years

Materials

anodised aluminium

Made of EN EV6060 anodized alumium 9x9cm custom mold with rounded edges, minimum thickness 2,7mm

Plan

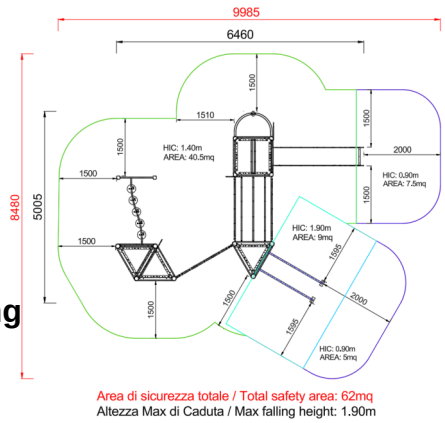

Picture

Manufacturer

Pozza 1865 S.R.L.

Country of manufacturing

ITALY

Components list

xABACOU0600-N_L_ALU - NG Numbers Panel Leaves
N. 1 .

xC1_ALU - NG Triangular platform, under tower
NR 1 Made of non-slip material

xG_120_90-190_ALU - NG Leg 120 from 90 190
NR 5 .

xGT-08_ALU - NG Climbing h50 cm
N. 1 Climbing between towers made of recycled material with resin climbing rocks

xLP-20_ALU - NG Large Leaf Accessory
N. 1 Leaves panel

xLP-5_ALU - NG Small Leaf Accessory
N. 2 Leaves panel

xP-7_L_ALU - NG Green Simple Panel
N. 1 Panel made of HDPE polyethilene, bi-color 86cm in width with drawing on the outer layer. all the fixing elements in Stainless steel

xPAL-02_ALU - NG Linear Gym-2
N. 1 Vertical net with frame made of lamellar wood beams fixed through disappearing and passing nuts and bolts Bars realized with stainless steel tubular pegs, mounted into two lateral wooden supports Climbing cord

xPAL-12_ALU - NG Single Vertical Wall Bars
N. 2 .

xPD-5_ALU - NG Right mobile bridge
N. 1 Mobile bridge made of a painted steel frame with HDPE moving flowers as base and a rubber floor for safety

xPP-14_ALU - NG Fireman pole h 140 cm
N. 1 Made of tubular stainless steel

xQT4-14_L_ALU - NG Tower h140 with Roof Leaves
N. 1 Composed by 4 posts having a 9 x 9 cm section by aluminium, 1 square platform placed at a height of 140 cm. Coloured polyethylene gable roof.

xS4-14_ALU - NG Steel ladder h140 cm
N. 1 Rungs made of stainless steel. Complete with steel bar.

xSCL1D-14_ALU - NG VERTICAL CLIMBING BOARD
N. 1 VERTICAL CLIMBING BOARD

xSTI-14_ALU - NG Descending tube slide h 140 cm
N. 1 Stainless steel slide made of tubular type

xSVPX-14_L_ALU - NG Poly-Inox Slide h140 Leaves
N. 1 slide with lateral sides made of polyethylene and stainless steel slide certified according to the existing rules; starting platform height 140 cm; provided with a transversal bar.

xT-14_ALU - NG Triangular tower without roof h 140 cm:
NR 1 Composed by 3 posts having a pentagonal section by lamellar wood, 1 square platform placed at a height of 140 cm.

METODO DI FISSAGGIO A TERRA DEI MONTANTI DEL GIOCO: Attrezzatura predisposta per fissaggio a terra mediante l'utilizzo di appositi telai metallici.

INFORMAZIONI RELATIVE ALL'ISPEZIONE: Ispezione visiva periodica - Controllo della pulizia dell'attrezzatura - Controllo degli interspazi tra terreno ed attrezzatura - Controllo della consistenza del terreno - Controllo delle fondamenta - Controllo degli spigoli - Controllo dell'eventuale mancanza di parti - Controllo dell'usura eccessiva delle parti mobili (snodi e boccole) - Controllo dell'integrità dell'intera attrezzatura. Per le aree gioco soggette ad uso intensivo o vandalismo può essere necessaria un'ispezione giornaliera. Ispezione annuale periodica: Potrebbe rendersi necessario lo smontaggio di alcune parti per la verifica

Copyright (C) POZZA 1865 S.r.l. - P.IVA IT02311670224 - info@pozza.it