data sheet

+AF703E2.SCL1-14_L_ALU
DRAGON WITH CLIMBING PLATFORM - LEAVES

Dimensions

Safety area	Impact area	Falling height HIC	Physical footprint	Number of users
11 x 9,5 m	36.5 mq	140 cm	7,5 x 6 x 3,5 m	20

Characteristics

2 hdpe

stainless steel screws

use under surveillance

Age range

From 3 to 12 years

Materials

anodised aluminium

Made of EN EV6060 anodized alumium 9x9cm custom mold with rounded edges, minimum thickness 2,7mm

Manufacturer

Pozza 1865 S.R.L.

Country of manufacturing

ITALY

Plan

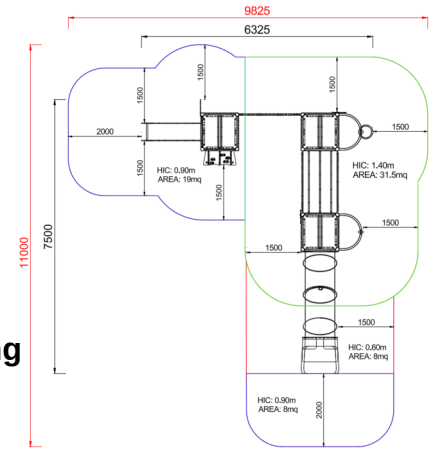

Area di sicurezza totale / Total safety area: 66.5mq
Altezza Max di Caduta / Max falling height: 1.40m

Picture

Components list

xABACOU0600-N_L_ALU - NG Numbers Panel Leaves
N. 1 .

xBV-3_L_ALU - NG Galaxy Panel Leaves
N. 1 Vertical panel made of polyethylene

xBV-4_L_ALU - NG Helicopter Activity Panel Leaves
N. 1 Made of colored polyethylene, sandwich type, with flow lanes, rotating disk and central knob

xLP-20_ALU - NG Large Leaf Accessory
N. 1 Leaves panel

xLP-5_ALU - NG Small Leaf Accessory
N. 2 Leaves panel

xP-7_L_ALU - NG Green Simple Panel
N. 1 Panel made of HDPE polyethilene, bi-color 86cm in width with drawing on the outer layer. all the fixing elements in Stainless steel

xPAL-02_ALU - NG Linear Gym-2
N. 1 Vertical net with frame made of lamellar wood beams fixed through disappearing and passing nuts and bolts Bars realized with stainless steel tubular pegs, mounted into two lateral wooden supports Climbing cord



xPD-10_L_ALU - NG Basic Straight Bridge Leaves
N. 1 Walkway made of impregnated wood, with plyethylene parapets

xPP-14_ALU - NG Fireman pole h 140 cm
N. 1 Made of tubular stainless steel



xPR_ALU - NG Fantasy Railing
N. 1 Fantasy railing in painted steel

xPS-14_ALU - NG Spiral perch h 140 cm
N. 1 Composed bystainless steel tubular, support bracket and locking handles in painted steel

xQT12-14_ALU - NG Square tower h140 cm
N. 1 .

xQT4-14_L_ALU - NG Tower h140 with Roof Leaves
N. 1 Composed by 4 posts having a 9 x 9 cm section by aluminium, 1 square platform placed at a height of 140 cm. Coloured polyethylene gable roof.

xQT4-9_L_ALU - NG Tower h90 with Roof Leaves
N. 1 Manufactured with 4 posts having a 9 x 9 cm section by lamellar wood, 1 square platform placed at a height of 90 cm. Coloured polyethylene gable roof.

xS4-14_ALU - NG Steel ladder h140 cm
N. 1 Rungs made of stainless steel. Complete with steel bar.

xS4-9_ALU - NG Steel ladder h90 cm
N. 1 rungs made of stainless steel.
Complete with steel bar

xSCL1D-9_ALU - NG Straight Climbing Platform with holds h90
N. 1 .

xSVPX-9_L_ALU - NG Poly-Inox Slide h90 Leaves
N. 1 slide with lateral sides made of polyethylene and stainless steel slide certified according to the existing rules; starting platform height 90 cm; provided with a transversal bar.

METODO DI FISSAGGIO A TERRA DEI MONTANTI DEL GIOCO: Attrezzatura predisposta per fissaggio a terra mediante l'utilizzo di appositi telai metallici.

INFORMAZIONI RELATIVE ALL'ISPEZIONE: Ispezione visiva periodica - Controllo della pulizia dell'attrezzatura - Controllo degli interspazi tra terreno ed attrezzatura - Controllo della consistenza del terreno - Controllo delle fondamenta - Controllo degli spigoli - Controllo dell'eventuale mancanza di parti - Controllo dell'usura eccessiva delle parti mobili (snodi e boccole) - Controllo dell'integrità dell'intera attrezzatura. Per le aree gioco soggette ad uso intensivo o vandalismo può essere necessaria un'ispezione giornaliera. Ispezione annuale periodica: Potrebbe rendersi necessario lo smontaggio di alcune parti per la verifica

Copyright (C) POZZA 1865 S.r.l. - P.IVA IT02311670224 - info@pozza.it