data sheet

+AF604WU_C_ALU

ISCHIA WITH SLIDE A TUBO - COLORI

Dimensions

Safety area	Impact area	Falling height HIC	Physical footprint	Number of users
12,5 x 11 m	0 mq	140 cm	9 x 8 x 3,4 m	35

Characteristics

Age range

3-12

Materials

Manufacturer

Pozza 1865 S.R.L.

Country of manufacturing

ITALY

Plan

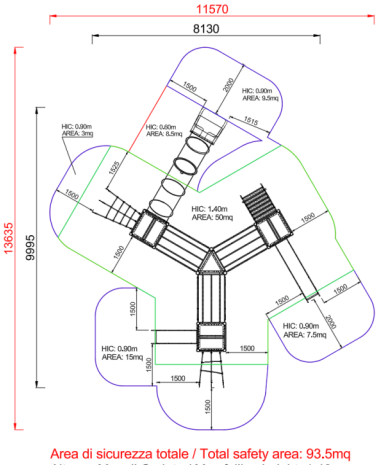

Area di sicurezza totale / Total safety area: 93.5mq
Altezza Max di Caduta / Max falling height: 1.40m

Picture

Components list

xQ-9_ALU - NG Square tower without roof h90 cm
N. 1 h90 cm tower without roof made of 4 EN EV6060 anodized alumium post with custom mold 9x9cm with rounded edges, minimum thickness 2,7mm. Central platform made of HDPE polyethilene with anti slip coating and painted and anodized steel brackets. All the fixing elements made of stainless steel

xS6-14_ALU - NG Shroud lift h140 cm
NR 1 Composed by climbing net in steel rope. Included by thrust bar

xS6-9_ALU - NG Shroud lift h90 cm
NR 1 Composed by climbing net in steel rope. Included by thrust bar

xT-14_ALU - NG Triangular tower without roof h 140 cm:
NR 1 Composed by 3 posts having a pentagonal section by lamellar wood, 1 square platform placed at a height of 140 cm.

METODO DI FISSAGGIO A TERRA DEI MONTANTI DEL GIOCO: Attrezzatura predisposta per fissaggio a terra mediante l'utilizzo di appositi telai metallici.

INFORMAZIONI RELATIVE ALL'ISPEZIONE: Ispezione visiva periodica - Controllo della pulizia dell'attrezzatura - Controllo degli interspazi tra terreno ed attrezzatura - Controllo della consistenza del terreno - Controllo delle fondamenta - Controllo degli spigoli - Controllo dell'eventuale mancanza di parti - Controllo dell'usura eccessiva delle parti mobili (snodi e boccole) - Controllo dell'integrità dell'intera attrezzatura. Per le aree gioco soggette ad uso intensivo o vandalismo può essere necessaria un'ispezione giornaliera. Ispezione annuale periodica: Potrebbe rendersi necessario lo smontaggio di alcune parti per la verifica

Copyright (C) POZZA 1865 S.r.l. - P.IVA IT02311670224 - info@pozza.it